


ORIGANE

LED Path Light . Origane Series

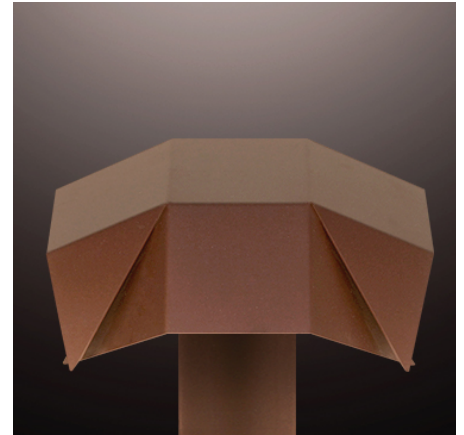

Product Features

- The Origane series adds a stylish and unique dynamic to any outdoor landscape while conserving Earth's natural resources.
- ETL outdoor wet location listed. IP65 standard.
- Provide safe illumination of path without glare.
- Static style comes in 12V or line voltage models.

Specification

Materials:

LED casing bracket/housing - glass
 Top Shield: Aluminum T6 6061 with stained glass (optional)
 Stem: Brass or Aluminum.

Voltage: 12V ,120V or 230V.

Wattage: 5W LED.

Dimmability: MLV/ELV @12V, phase dimming @120/230V.

Finish: Polyester powder coat on all aluminum materials with RoHS compliant procedures. Anodized finish is available. Stainless steel and brass models are provided with brushed surface.

Ordering Guide

EXAMPLE: ORIGANE - HASU - 120V - 5W - 2700K - BZ

SERIES	MODEL	VOLTAGE	WATTAGE	CCT	FINISH
ORIGANE	-	-	5W	-	-
	KAIKA	12V		2700K	Standard
	HANA	120V		3000K	BK Black Powder Coat
	HASU	230V			BZ Bronze Powder Coat
	CHOUWA				WT White Powder Coat
					Premium
					ABK Anodized Black
					ACL Anodized Clear
					CC Custom Powder Coat

Remote Step Down Transformer for 12V fixture(Optional).
 See "[Accessories](#)" link for detailed specification.

Model	Wattage(VA)	Primary Voltage(VAC)	Secondary Volt(VAC)	Dimming Method	Characters
	-	-	-	-	-
TXM	20 40 50 60 100 150 300	120 or 277	12	MLV	Outdoor, Wall Mount, Compact
TXS	150 300 600	120	Multi-tap of 12, 13, 14, 15 VAC	MLV	Outdoor, Wall mount, Stainless Steel Case
IGT	50 100 300 600	120	12	MLV	in grade
TXE	60	120, 230, or 277	12	ELV	Needs Enclosure, 6ft working distance

Product Drawings

NOTE: Specification and dimensions subject to change without notice.

